

Operation Instructions

Make your choice...


ADC-EB-205WT Wireless Transmitter



1 Safety Instruction


! Thanks for your purchasing, please refer to the following before using.

2 Product Overview

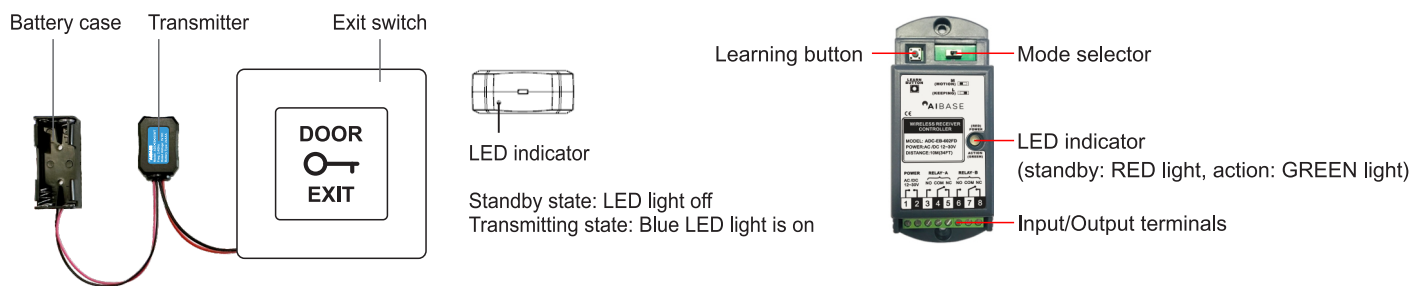

- This product wireless function adopt self-learning code, the transmitter must be matched with the receiver before use it, and it can learn up to 20 transmitters.
- Learning method: Press the learning button of the receiver for 1 second, RED light will turn to GREEN light, enter the learning state, then push the exit switch, RED & GREEN indicator lights flash twice alternately, learning successfully.
- Deleting method: Press and hold the learning button of the receiver for 5 seconds, RED & GREEN indicator lights flash alternately quickly, all codes will be deleted.

3 Wiring Diagram

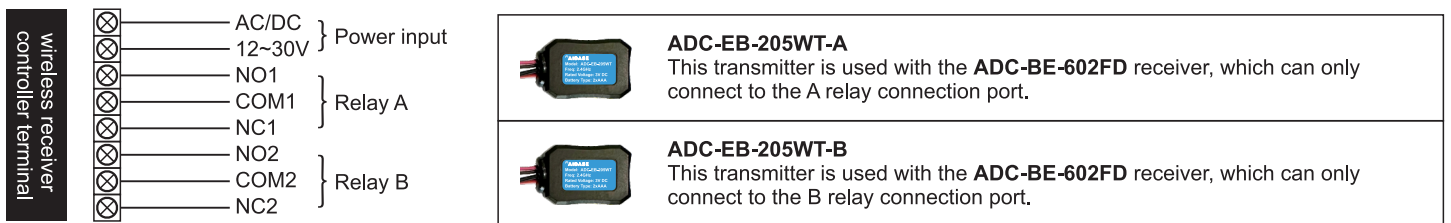

4 Output status selection

L <input type="checkbox"/> M <input checked="" type="checkbox"/>	If in the M state, it is inching output, each time the transmitter senses, relay A/B will output 1.5s door open signal.	L <input checked="" type="checkbox"/> M <input type="checkbox"/>	If in the L state, it is holding output, each time the transmitter senses, the output signal state of relay A/B will reverse once.
--	---	--	--

5 Technical Parameter

Wireless receiver		Transmitter	
Power supply:	AC/DC 12 ~ 30V	Power supply:	2pcs AAA batteries
Standby current:	22 mA (DC 12V power supply)	Standby current:	≤10μA
Action current:	68 mA (DC 12V power supply)	Emission current:	10.5mA
Output signal:	Relay two independent output	Life of battery:	300 times/day, about 20 months
Contact capacity:	3A 30V DC	Receiver sensitivity:	-95dbm
Appearance size:	123(L)x50(W)x32(H)mm	Emission distance:	Over 30 meters in no obstacles area
		Product size:	45(L)x23(W)x9.6(H)mm