

Unpacking

Please make sure the package contains the following items:



IT82 x 1



ST4x20 screw x 2



8 Pin cable x 1



Wall bracket x 1



Screw fixing seat x 2




10 Pin cable x 1




M4x30 screw x 2

Product Overview

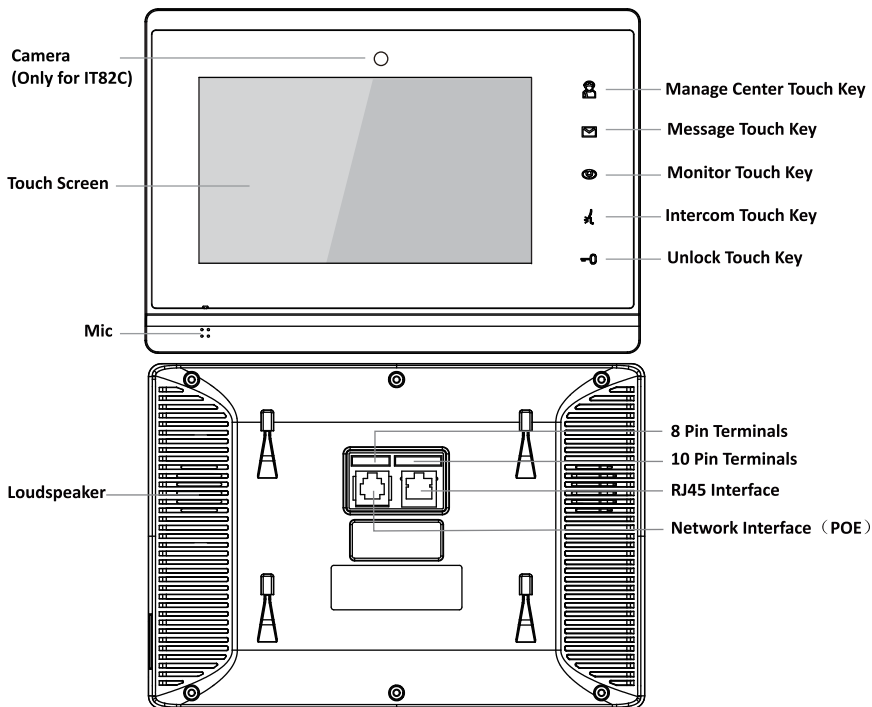


Installation


Without 86 embedded box in the wall




Mark 2 fixation holes through wall bracket on the wall, the distance between which is 60mm. Make sure the all cables can be passed from the middle of wall bracket.



Take down the bracket, then using a 5mm hand drill to make the 2 fixation holes on the wall you marked before.




Use 2 ST4X20 screws to fix the wall bracket in the wall.




Once the fixation holes are made, insert the two screw fixing seats provided.



With 86 embedded box in the wall




Make sure all cables in the 86 embedded box.



Fix the wall bracket on the 86 embedded box with 2 M4X30 screws.

Device Mounting

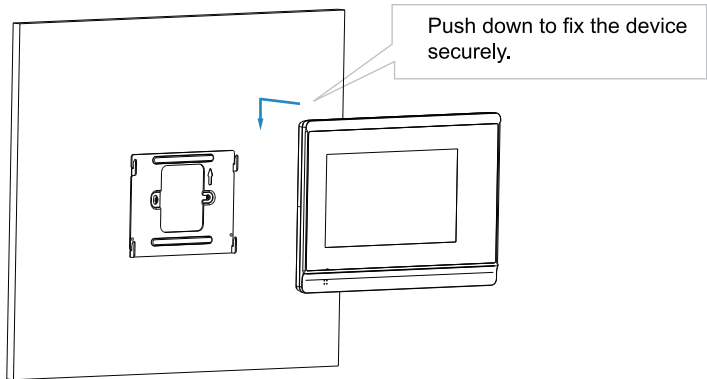

Configuration

1. Access Basic Information: After setting up network and power, enter **Settings -> System Info** to check Account, Network, Version status.
2. Access the Website: Launch a browser and type in the IP address then enter the username and password to login. (username/password: admin /admin by default).
3. Account Registration: On web UI, go to the path: **Account -> Basic** page to fill in the account information, click Submit to confirm. (Please refer to user manual for more information).

Operation

Make a call:

Press Intercom touch key  or Intercom icon , enter the callee's number or room address, press Dial key  to make a call.

Receive a call:

Press Answer key  on the incoming interface to pickup the incoming call.

Unlock

During the talk, called party can press Unlock Key  on the talking interface or Unlock touch key  to unlock the door.

Monitor

Press Live View icon  or Monitor touch key  to receive the video from the IPC any time.

Notice Information

Information contained in this document is believed to be accurate and reliable at the time of printing. This document is subject to change without notice, any update to this document can be viewed on Akuvox' s website: <http://www.akuvox.com> © Copyright 2016 Akuvox Ltd. All rights reserved.



YS82000003