
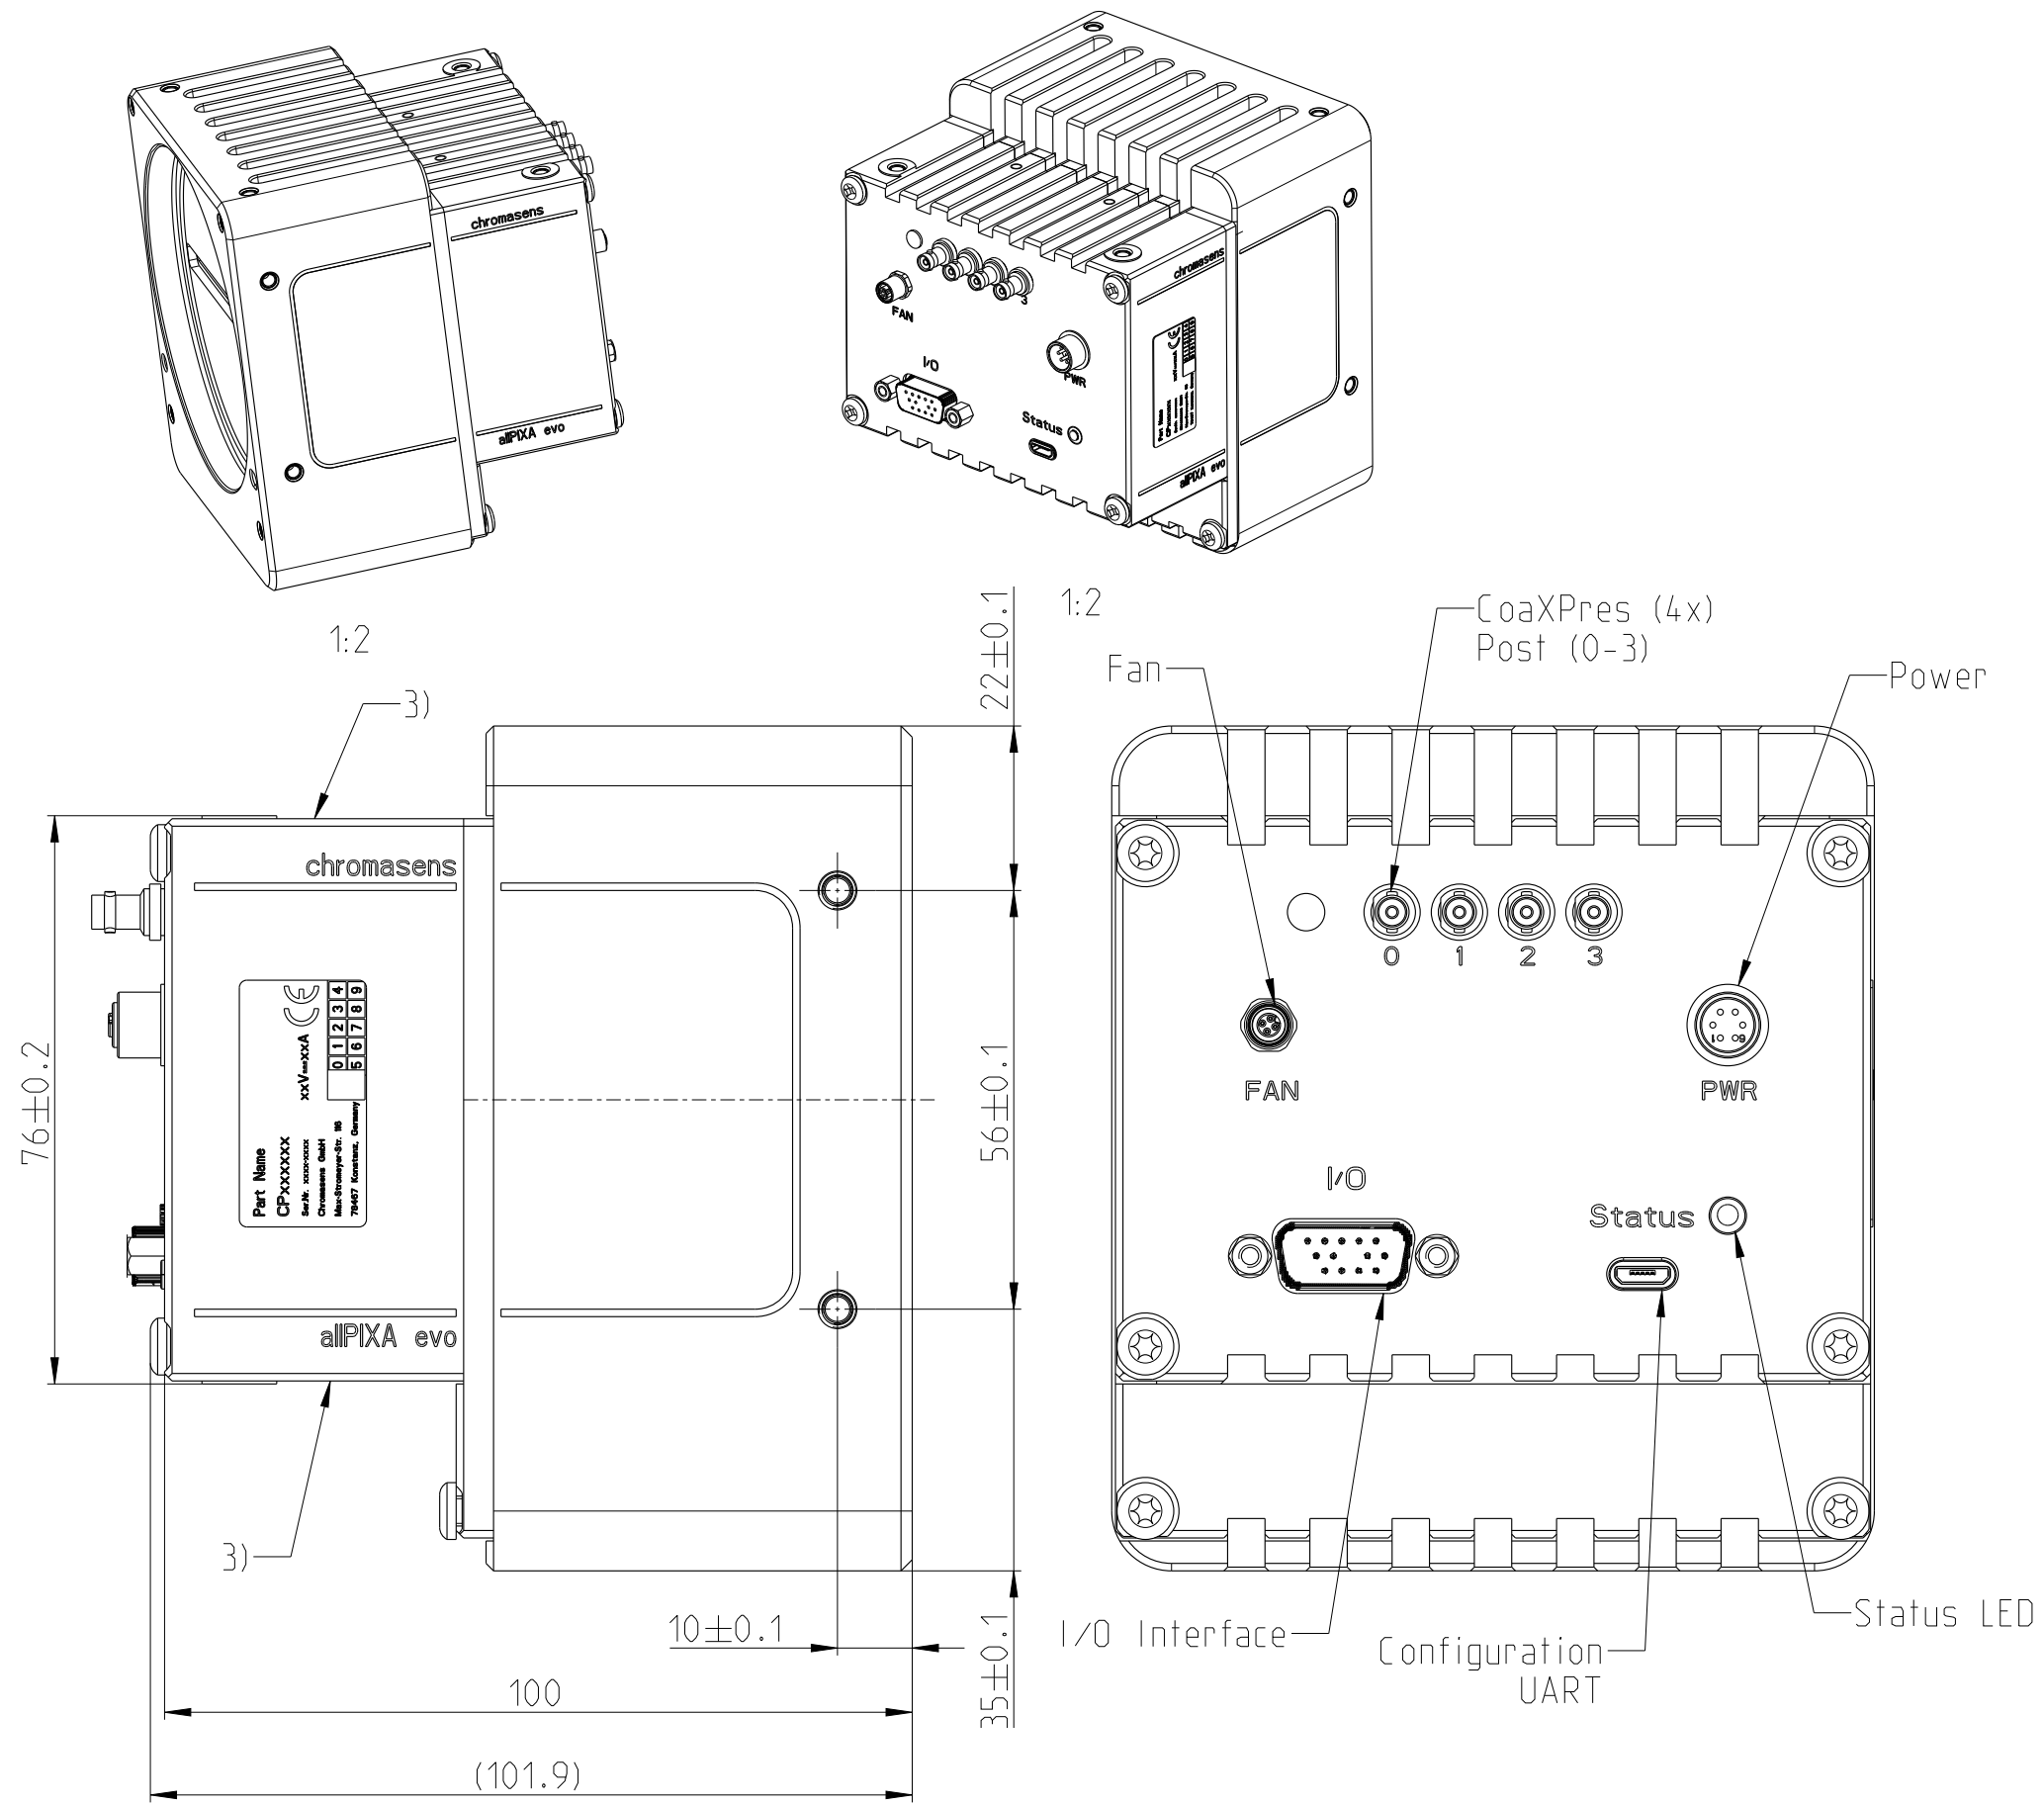
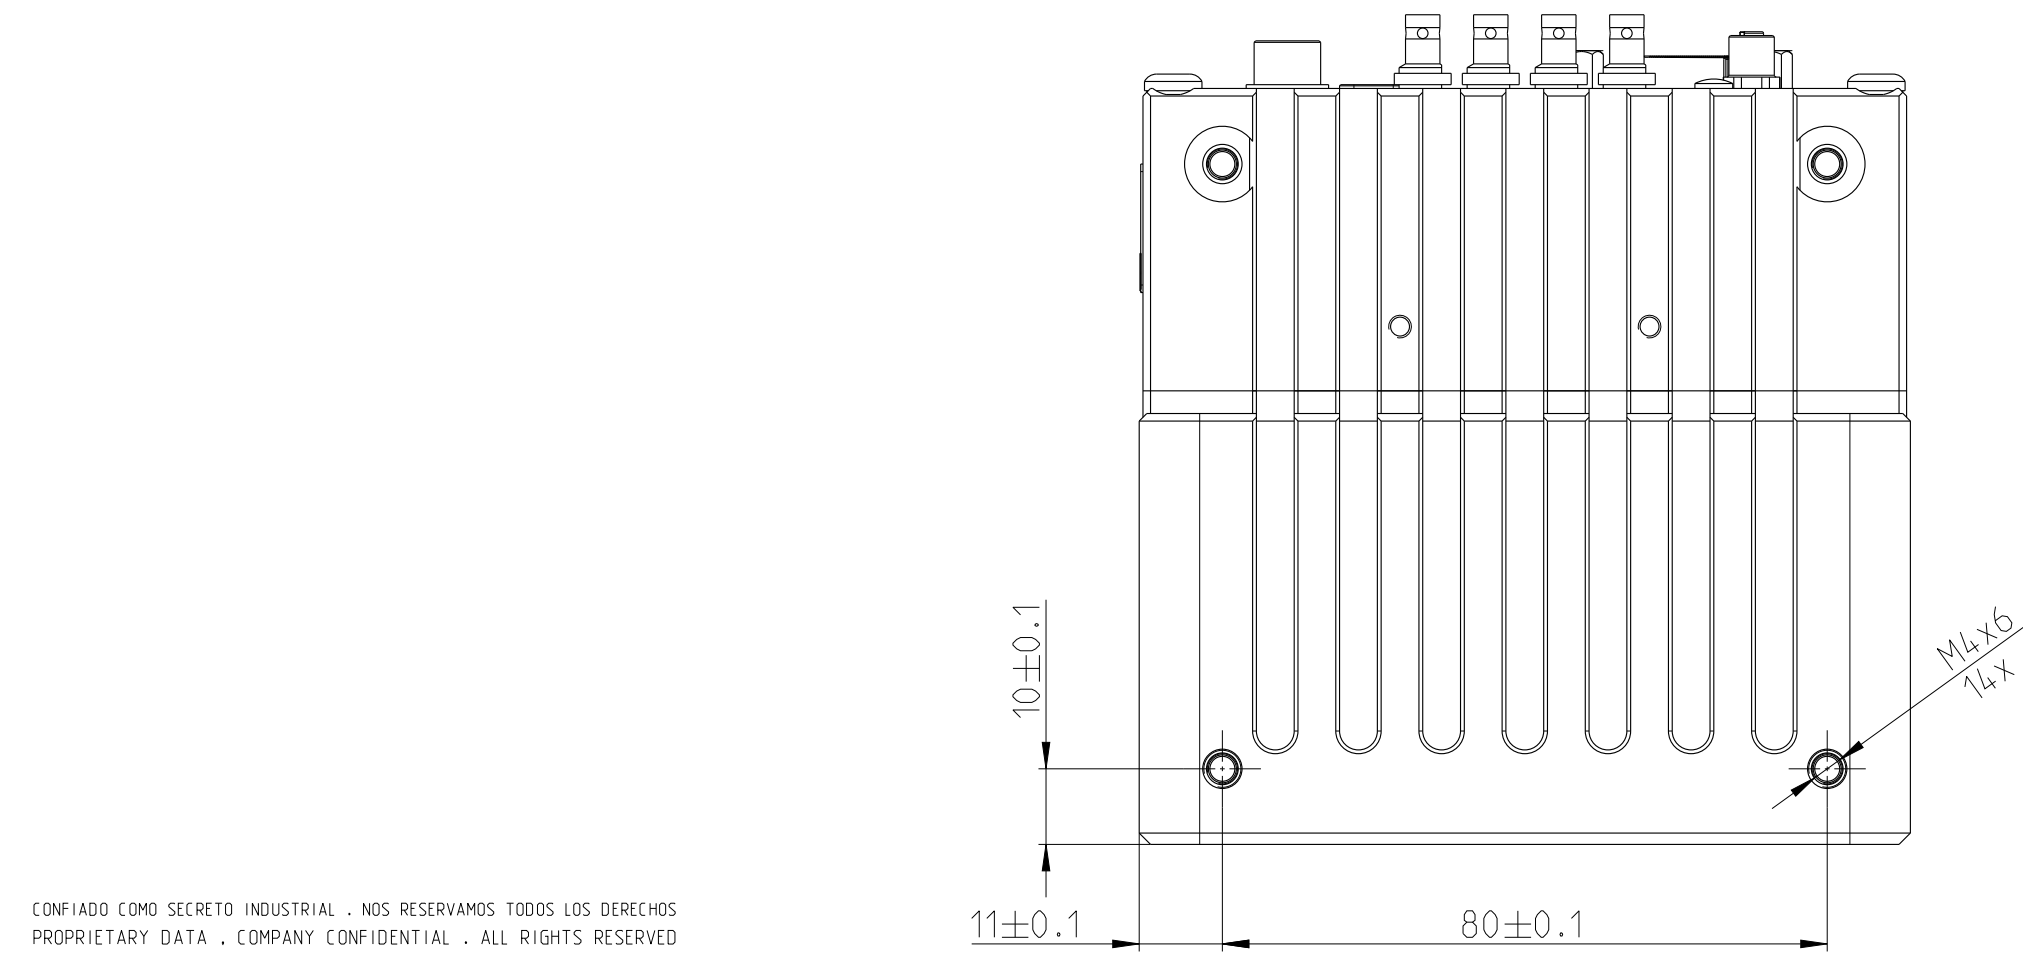


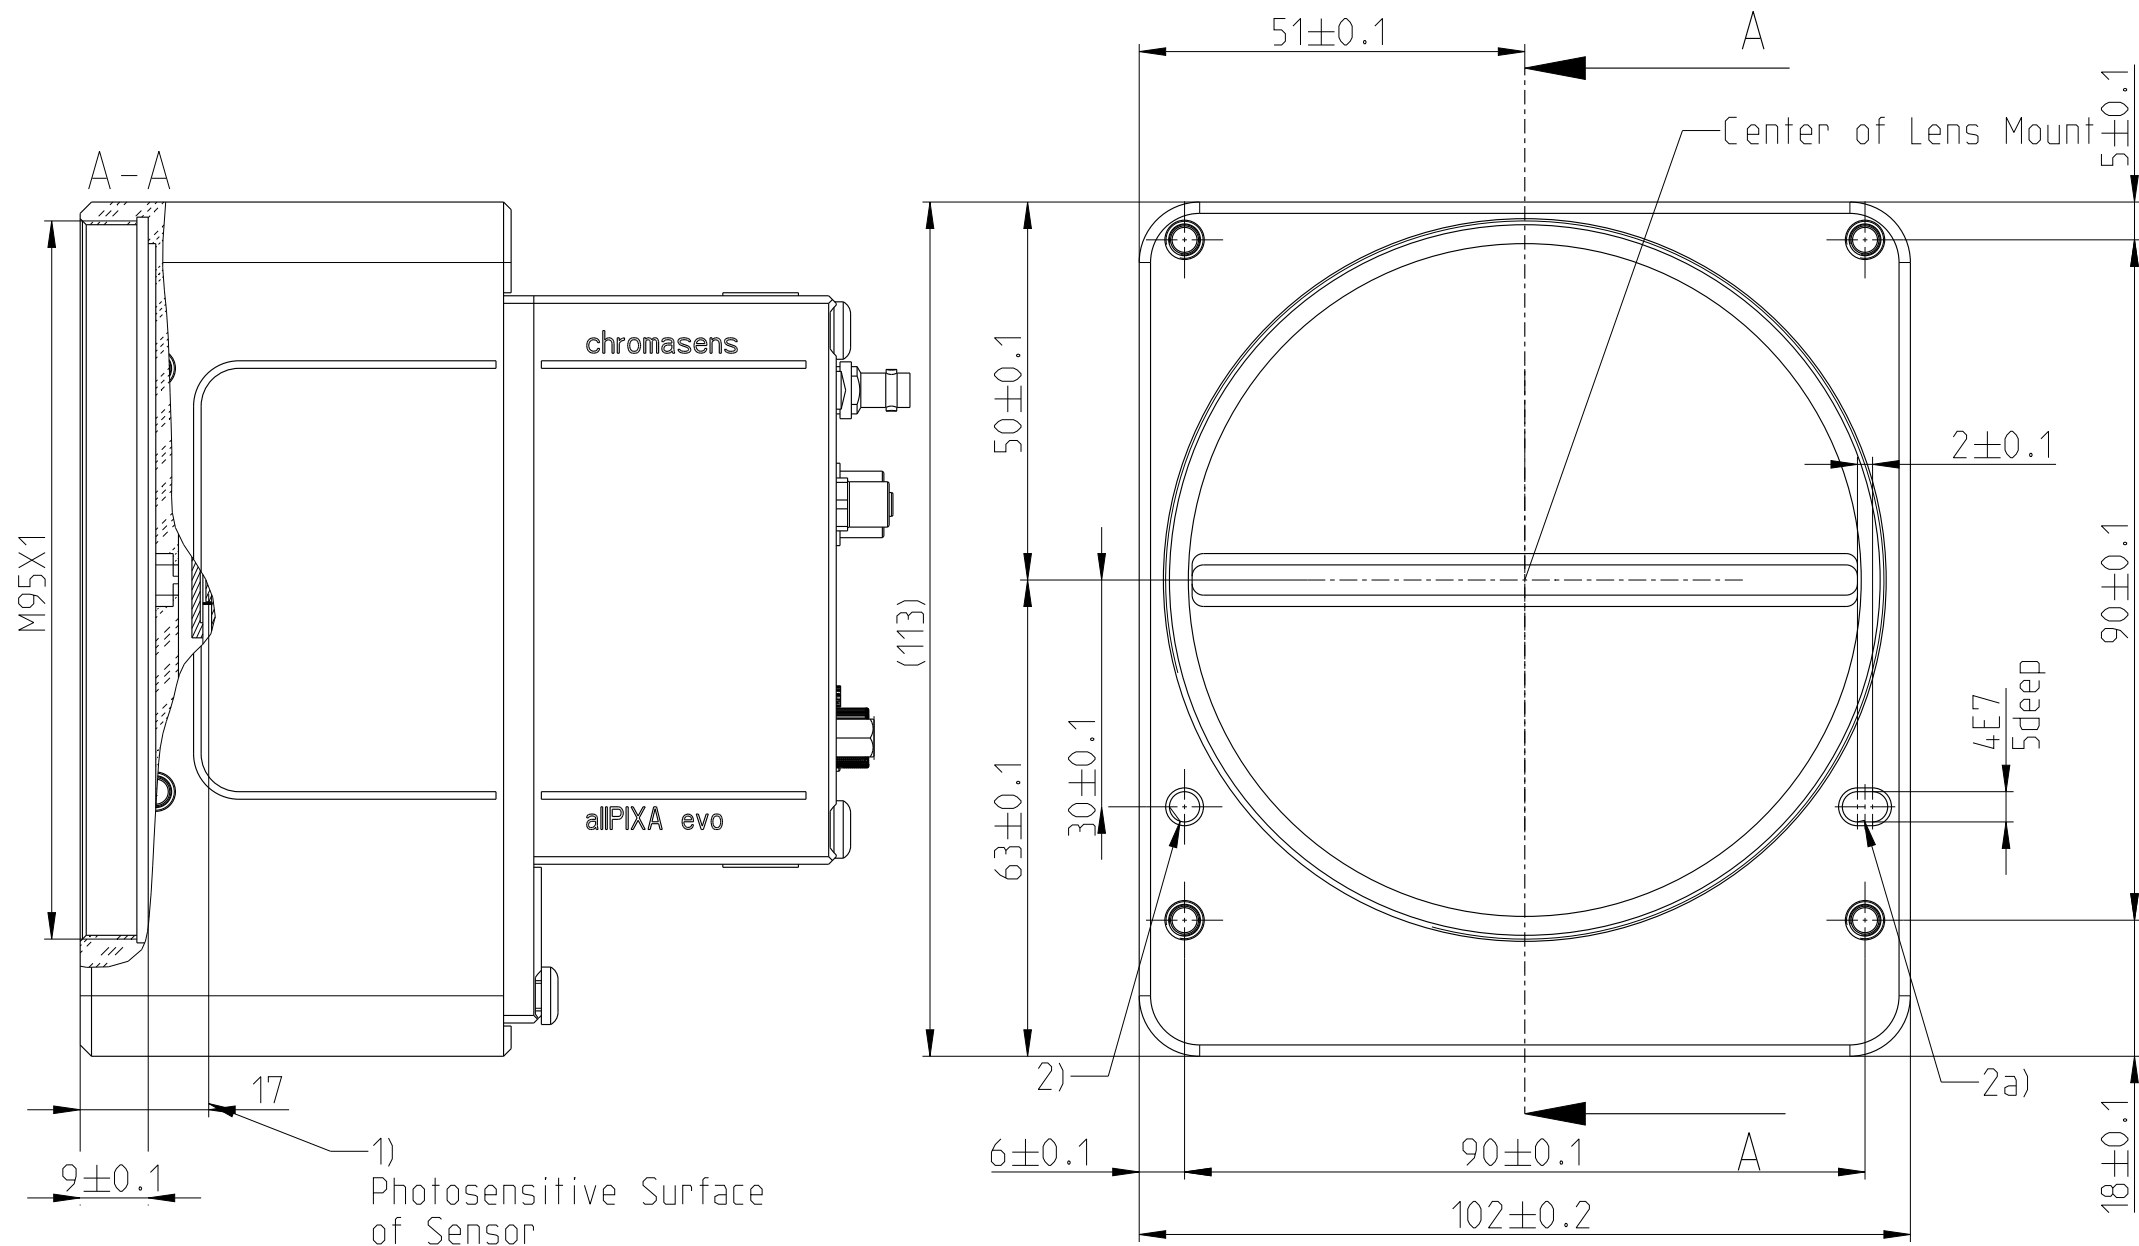


1) Photosensitive Surface of Sensor:
17,0mm (optical, with sensor glas elongation)
16,63mm (mechanical),
-> 3D-Model geometry is in consideration of the optical path.
-> sensor tolerances according user manual

2) Positioning Hole $\varnothing 4 \text{E}7$ for Pin $\varnothing 4$ mm (Tolerance m6)
and floating side 2a) ($4 \text{E}7 \times 3$ mm).

3) Thermal pad for Cooling options (see accessoires)

Positioning and Tolerances according to User Manual

CONFIADO COMO SECRETO INDUSTRIAL . NOS RESERVAMOS TODOS LOS DERECHOS
PROPRIETARY DATA . COMPANY CONFIDENTIAL . ALL RIGHTS RESERVED
Weitergabe sowie Vervielfaeltigung dieser Unterlage . Ver-
wertung und Mitteilung ihres Inhalts nicht gestattet . soweit
nicht ausdrecklich zugestanden . Zuwiderhandlungen ver-
pflichten zu Schadensersatz . Alle Rechte vorbehalten . insbe-
sondere fuer den Fall der Patenterteilung oder GM-Eintragung .

ISO 128 		Tol ISO 8015 DIN 2768 - mH		ISO 1302		Massstab 1:1		Crea4.0		
						CP000620-S-32K-33-L1-CX-Z				
				Datum: 07.08.2025		allPIXA evo 32K CXP Z			Blatt	
				Name: Joggerst						
				Gepr.:						
01	-	-	-	Chromasens GmbH						
Zust	Mitteilung	Datum	Name	Max-Straßengasse 116 GER 79647 Konstanz			CM060-B800-V1512-C			1 / 1